


Dual & Double Hole Fiber Pigtail

Applications:

- Collimators
- Isolators
- Switches
- WDM
- Circulators
- Interleavers

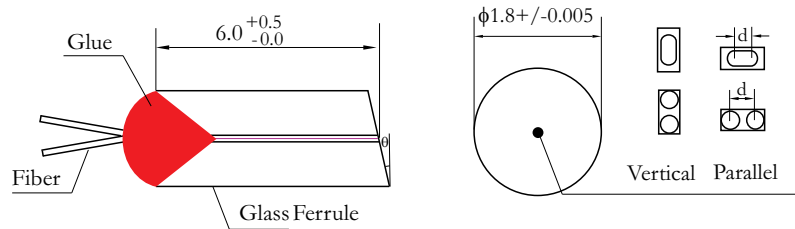

Capability:

Typical Ferrule Diameter: 1.800+/-0.005mm

Wedge Tolerance: <+/-0.2°

Core Scratch/Dig: 0/0

Typical Return Loss: >65dB

Coating: AR Coating, $R < 0.1\% @ \lambda_c$, $< 0.25\% @ \lambda_c \pm 40\text{nm}$

or $R < 0.25\% @ 1310\&1550 \pm 40\text{nm}$

$\lambda_c = 1310, 1480, 1550\text{nm}...$

Other Capability with different wedge angles, coatings, fibers, and ferrule lengths are also available upon request

