




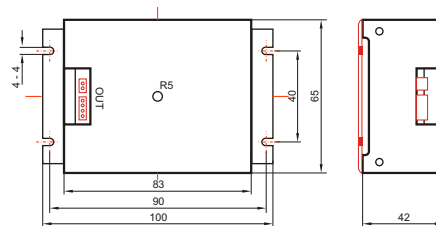


OEM Version Power Supply


Alternating Current (AC) Power Supply

	LDD-800A	LDC-800A	LDC-2500A
Laser Diode Driver			
Driver Current	0-800mA	0-800mA	0-2500mA
Driver Current Limit	50-800mA	50-800mA	50-1500mA
Max. Driver Voltage	3.0V		
TTL Modulation	DC-10kHz		
Temperature Control			
Max. Driver Current	Not Included	1.3A	2A
Max. Driver Voltage		8V	8V
Temperature Sensor		10Kohm NTC Thermistor	
General Specifications			
Dimension(mm)	65(W)x42(H)x100(L)	100(W)x45(H)x200(L)	120(W)x65(H) x 184(L)
Operating Temperature, Case	-10 °C ~ +60 °C	-10 °C ~ +60 °C	-10 °C ~ +60 °C
Operating Voltage	100~240VAC, 50/60Hz		

LDD-800A



LDC-800A

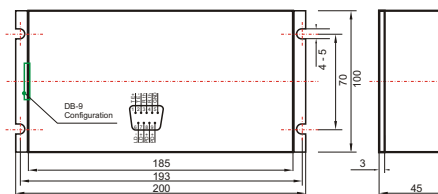

LDC-2500A

